




1300 ENTERPRISE ROAD GENEVA, ALABAMA 36340-0580 800-239-4621 FAX 1-800-508-1469 www.reliablelouvers.com

## 4TBSS/6TBSS RECTANGULAR TUBE BLADE SUNSHADE HORIZONTALLY MOUNTED

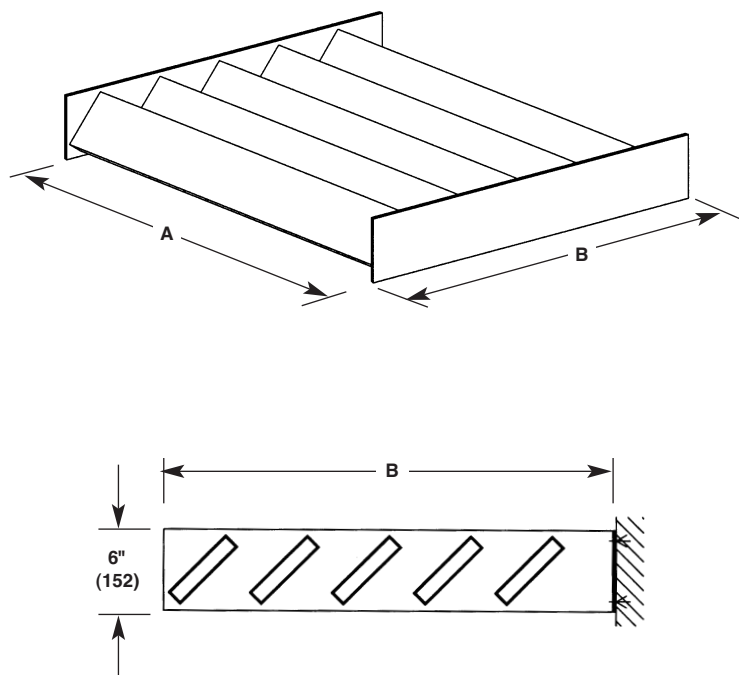

### STANDARD CONSTRUCTION

#### BLADES

6063T5 extruded aluminum rectangular tubes.  
4TBSS - 1<sup>3</sup>/<sub>4</sub>" x 4" x .125" (44 x 102 x 3.2) installed at 45° angle and 4<sup>1</sup>/<sub>2</sub>" (114) center-to-center spacing.  
6TBSS - 2" x 6" x .125" (51 x 152 x 3.2) installed at 45° and 6" (152) center-to-center spacing.

#### OUTRIGGERS

6" wide x .375" thick (152 x 10) flat, non-tapered aluminum rectangle. Other outrigger designs are available at additional cost.

#### FASCIA

Available at additional cost.

#### INSTALLATION

Installation brackets and hardware by others.

#### CONSTRUCTION

All welded.

#### FINISH

Mill.

#### MINIMUM SIZE

12"w x 12"h (305 x 305).

#### APPROXIMATE SHIPPING WEIGHT

6 lbs. per sq. ft. (29 kg/m<sup>2</sup>).

#### MAXIMUM SINGLE SECTION SIZE

Consult factory.

#### OVERALL

Single sections may be joined together in the field for unlimited overall size. Field assembly and supporting structure are by others.

### VARIATIONS

- Alternate blade spacing.
- Alternate blade installation angles.
- Outrigger Options: tapered bar, channel and tube.
- Fascia Options: channel, round and bullnose shapes.
- Installation brackets and hardware are available.
- Selection of finishes: baked enamel (modified fluoropolymer), Kynar, Pearledize 50 & 70, prime coat, clear and color anodize. (Some variation in anodize color consistency is possible.)

All variations are available at additional cost. Consult Reliable for other special requirements.

Dimensions in parenthesis ( ) indicate millimeters.

TAG	QTY.	ACTUAL SIZE		VARIATIONS
		A - WIDE	B - HIGH	
PROJECT		LOCATION		
ARCH./ENGR.		CONTRACTOR		
REPRESENTATIVE		DATE		