

AEL-42

W/7116 Frame (Position #2)

1" Installation




STANDARD CONSTRUCTION

- Extruded aluminum; 6063-T5; clear Anodized or _____
- 42° architectural decorative louver PTAC wall application w/7116 frame position #2 face view for illustration purposes only
- PTAC drain system requirements (specify)
- External drains:
 - Standard unit weep holes - (unit drains through louver)
 - Exterior drain tube - (punch hole in louver blade for drain tube) specify tube location: (left side, right side or both side) of PTAC Unit
- Internal drains:
 - Job using internal drain system (no standard unit weep holes, only PTAC emergency overflow holes)

OPTIONS

- Blank off attached on backside in inactive areas
 - .032 aluminum sheet
 - .032 aluminum (2 sides) w/1" inch insulation
- Exterior mounting holes as required
- Frames of choice see frame submittal sheet

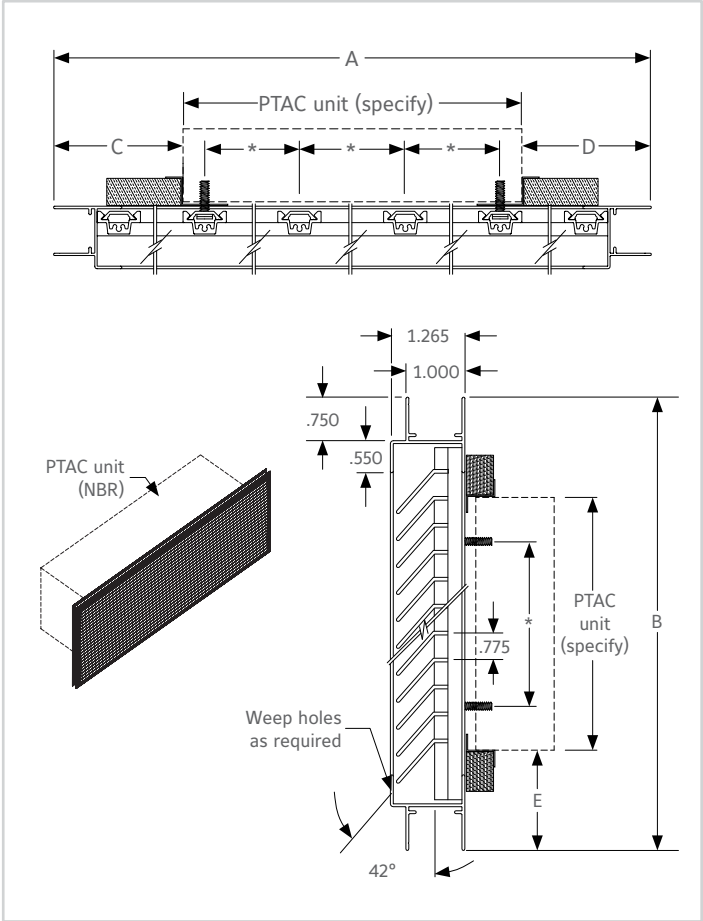

Unit Type	Unit Model No.	Actual Size					Variations
		A	B	C	D	E	

PROJECT	LOCATION
ARCH. / ENGR.	CONTRACTOR
REPRESENTATIVE	DATE

LINKS TO IMPORTANT DOCUMENTS

Document Title
Finishes and Color Guide
Limited Warranty Document



1300 Enterprise Road, P.O. Box
580, Geneva, Alabama 36340
Tel: 334-684-3621
Tel: 800-624-3914
Fax: 800-508-1469